

Masterials

Pin: Brass, machined, (H59-3)

Plating: Gold plated: 1.25u"m/50u"nickel, full gold

Insulator body (black): PPS (UL94V-0)

Electrical

Current rating: 2 Amps/contact max.

Contact resistance: 20mΩ




Insulation resistance: 1000MΩ

Operating voltage: 60 AC/DC

Mechanical

Operating temperature : Gold plated: -40°C to +105°C

Soldering temperature: 260°C, 10s max

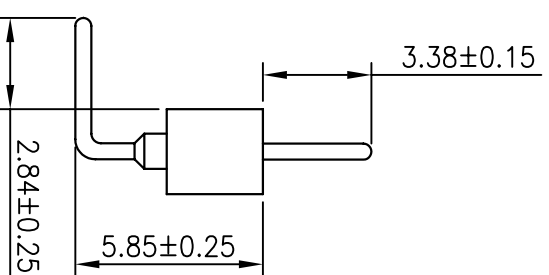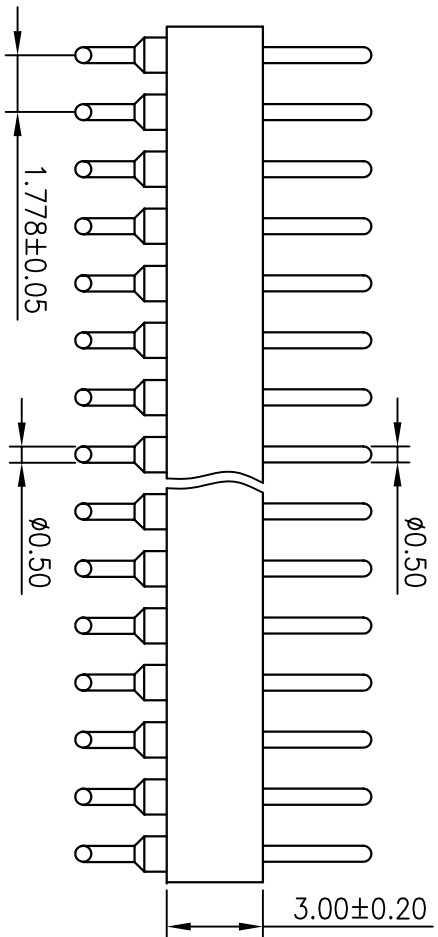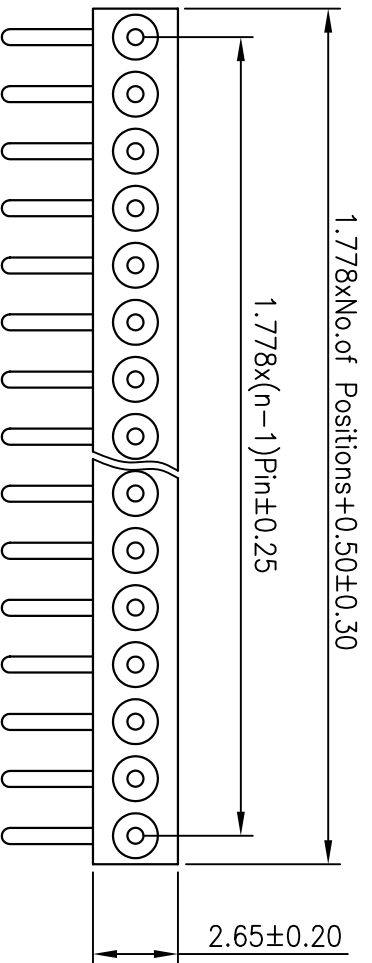

Ordering Information

3613 30 1 XX R XX 126 01

Insulator Type: 1: Single row
No. of Pins: 1x40Pins
Contact Plating: SN/Tin
SN/Tin
G0: Gold Flash
G2: 2U Gold
G3: 3U Gold
G4: 5U Gold
G5: 10U Gold
S0: Gold Flash/Tin
Standard: G0

OPERATION		DRAW		SCALE		FIT		PART NO.	
X.X	±0.30	Y/YuSheng	12.07.23	UNIT	mm	A4	1/1	3613301XXRX12601	
X.XX	±0.20	CHECK		SIZE	A4				
X.XXX	±0.10	APPROVE		SHEET	1/1				
Angle	±3°			PROJ.					
DIM	TOL								

JIN 深圳市锦凌电子有限公司
SHENZHEN JINLING ELECTRONIC CO.,LTD
Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992

1.778X3, 0 Machine Pin Header
90° L=12.6