




FILE NO.:E828310


SPECIFICATIONS

Rated Current:3.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°c to +105°c

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PBT
 Max.Processing Temp: 180°C for 30-60 seconds
 (200°C for 10 seconds)

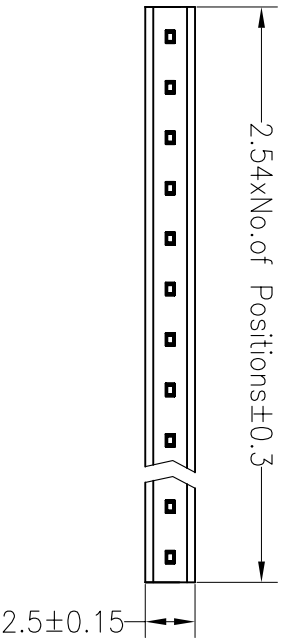



Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

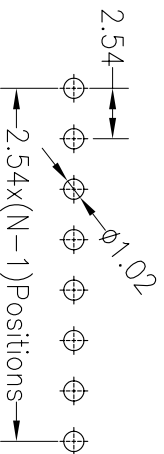

Ordering Information

2235 01 XX X N XX S Y X 01

- No. of Pins Per Row: 1*40
- Insulator Material Option: A=BK-PBT, B=BK-PA66, C=BK-PA6T, D=BK-PA46, F=BK-LCP
- Contact Plating: G1:1U" Gold, G2:1.5U" Gold, G3:2U" Gold, G4:3U" Gold, G5:5U" Gold, S0:Gold Flash/Tin, SN:tin
- Packaging: 0=PE Bag, A=Tray, T=tube, P=Tube+Cap, R=Reel+Cap, M=Reel+Mylar

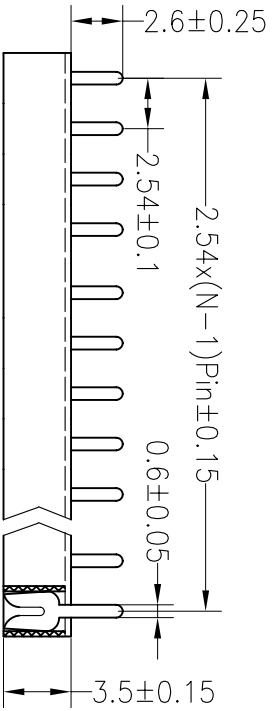

OPERATION	X.X	±0.30	DRAW	YHUSheng	12.03.28	SCALE	FIT	UNIT	mm
	X.XX	±0.20							
ANGLE	X.XXX	±0.10	APPROVE			SIZE	A4	SHEET	1/1
	Angle	±3°							
REV	DATE	MODIFICATION DESCRIPTION	CHANGE			TITLE:	PART NO. 223501XXXXXXSYX01		
A0	2012.03.28	NEW DRAWING				TITLE: 2.54PF H3.5mm 1x4pin 180° DIP			

JIN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992