
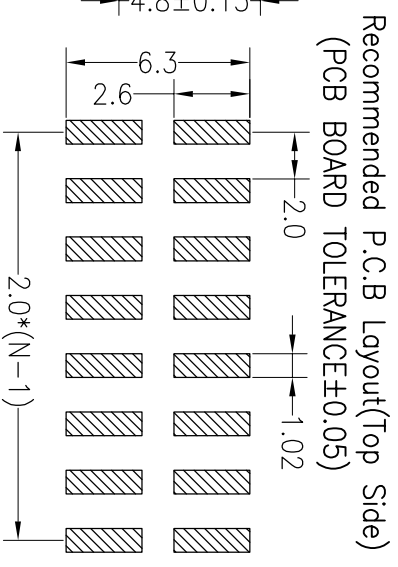


**SPECIFICATIONS**



Rated Current: 1.5AMP  
 Contact Resistance: 20mΩ Max  
 Withstand Voltage: 400V AC/DC  
 Insulation Resistance: 800MΩ Min  
 Operation Temperature: -40°C to +105°C  
 Contact Material: Brass  
 Contact Plating: Au or Sn Over Ni  
 Insulator Material: Polyester (UL94V-0)  
 Standard: PA6T  
 Max. Processing Temp: 230°C for 30-60 seconds  
 (260°C for 10 seconds)

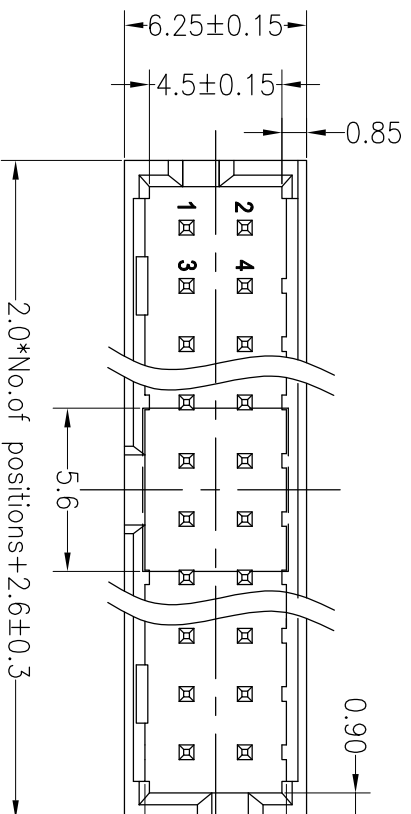

**Ordering Information**

**3221-XX M XX X B K00 X 01**

- No. of Pins: 6--64P
- Contact Plating: G0:Gold Flash, G1:1U" Gold, G2:1.5U" Gold, G3:2U" Gold, G4:3U" Gold, G5:5U" Gold, S0:Gold Flash/Tin, SN:Tin
- Insulator Material Option: A=BK-PBT, C=BK-PA6T, D=BK-PA66, E=BK-PA9T, F=BK-LCP
- Packing: O=PE Bag, A=Troy, T=Tube, P=Tube+Cap

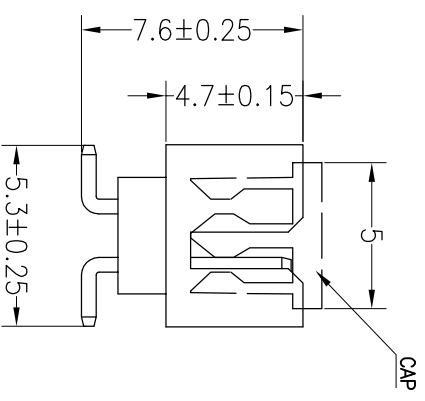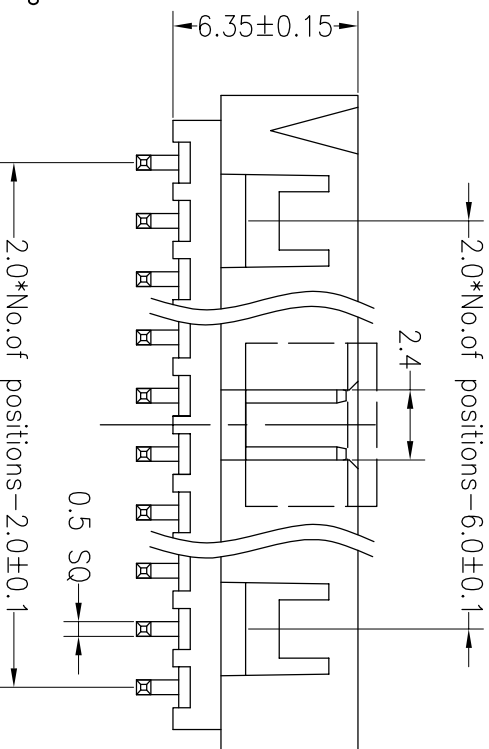

OPERATION		DRAW		SCALE		FIT		TITLE:	
X.X	±0.30	Y YuSheng	19.09.18	UNIT	mm	A4	1/1	PART NO. 3221-XXMXXBK00X01	
X.XX	±0.20	CHECK		SIZE				2.0Box Header Npin H6.35 SMT	
X.XXX	±0.10	APPROVE		SHEET					
Angle	±3°			PROJ.					
DIM	TOL	CHANGE							
REV	DATE	MODIFICATION DESCRIPTION							
A0	2019.09.18	NEW DRAWING							
1									

**JILIN** 深圳市锦凌电子有限公司  
 SHENZHEN JINLING ELECTRONIC CO.,LTD  
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5892