
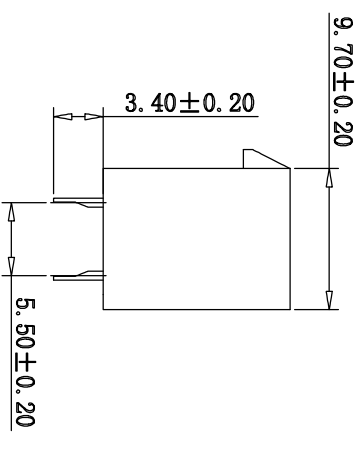
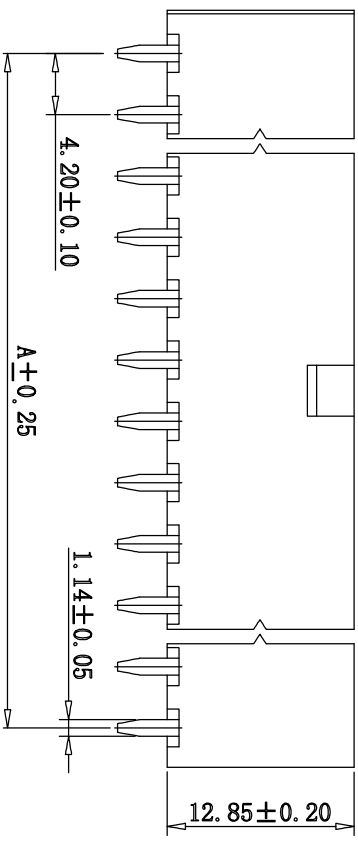


# HSF ROHS

## SPECIFICATIONS

Rated Current: 7.0AMP  
Contact Resistance: 30mΩ Max  
Withstand Voltage: 1500V AC/DC  
Insulation Resistance: 1000MΩ Min  
Operation Temperature: -40°c to +105°c

Contact Material: Brass  
Contact Plating: Sn Over Ni  
Insulator Material: Polyester (UL94V-2)  
Standard: PA66

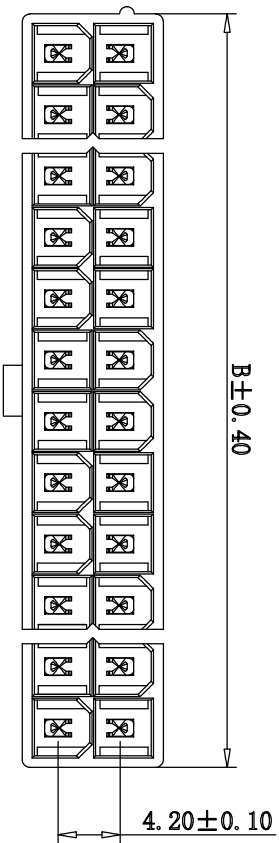


## Ordering Information

JL 4201 S - 2 XX A SN W 0 1

Head Pin: 2-24P  
Contact Plating: G0:Gold Flash / SK:In  
Insulator Color: W=White / B=Black / R=Reel  
Packing: O=Pa. bag / T=Tube

## P. C. B LAYOUT

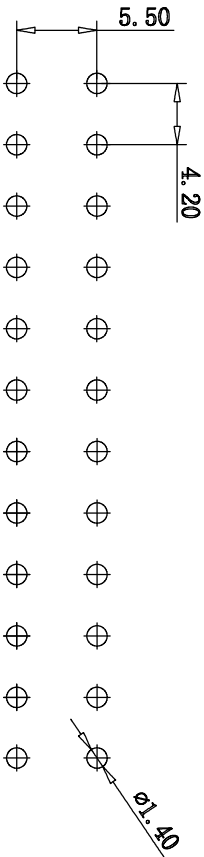

Pins	Dimensions (mm)	
	A	B
2*01	—	5.60
2*02	4.20	9.80
2*03	8.40	14.00
2*04	12.60	18.20
2*05	16.80	22.40
2*06	21.00	26.60
2*07	25.20	30.80
2*08	29.40	35.00
2*09	33.60	39.20
2*10	37.80	43.40
2*11	42.00	47.60
2*12	46.20	51.80

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION		DRAW	Yiyusheng	18.04.03	SCALE		FIT	PART NO.	TITLE:
				ANGLE	TOL				UNIT	SIZE			
A0	2018.04.03	NEW DRAWING		X.XX	±0.30				mm	A4	JL4201S-2XXASNNW01	Mx4.20mm Water 2xNpin 180°	
1				X.XX	±0.20	CHECK							
				X:XXX	±0.10					1/2			

**JILIN** 深圳市锦凌电子有限公司  
SHENZHEN JINLING ELECTRONIC CO.,LTD  
Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5892