
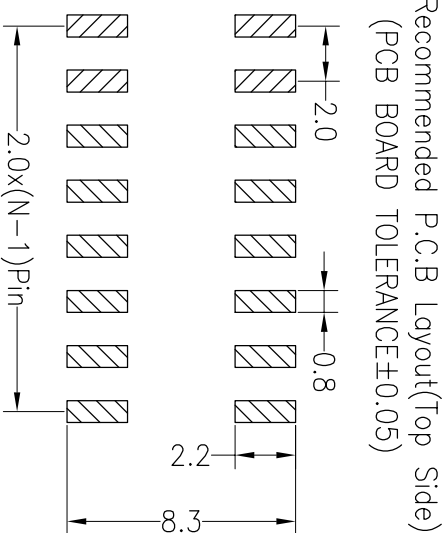


## SPECIFICATIONS

Rated Current: 1.5AMP  
 Contact Resistance: 20mΩ Max  
 Withstand Voltage: 500V AC/DC  
 Insulation Resistance: 1000MΩ Min  
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze  
 Contact Plating: Au or Sn Over Ni  
 Insulator Material: Polyester (UL94V-0)



Standard: PA6T  
 Max. Processing Temp: 230°C for 30-60 seconds  
 (260°C for 10 seconds)

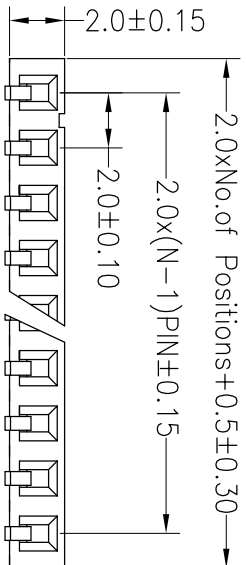

## Ordering Information

2345 01 XX X N XX M UX 01

No. of Pins Per Row 1\*2~1\*40  
 Insulator Material Option:  
 A=BK-PBT  
 B=BK-PA66  
 C=BK-PA6T  
 D=BK-PA46  
 E=BK-PA9T  
 F=BK-LCP  
 Contact Plating:  
 G0:Gold Flash  
 G1:3U" Gold  
 G2:5U" Gold  
 G3:10U" Gold  
 G4:15U" Gold  
 G5:30U" Gold  
 S0:Gold Flash/Tin  
 SN:1in  
 Packing:  
 O=PE Bag  
 A=Tray  
 T=Tube  
 R=Reel

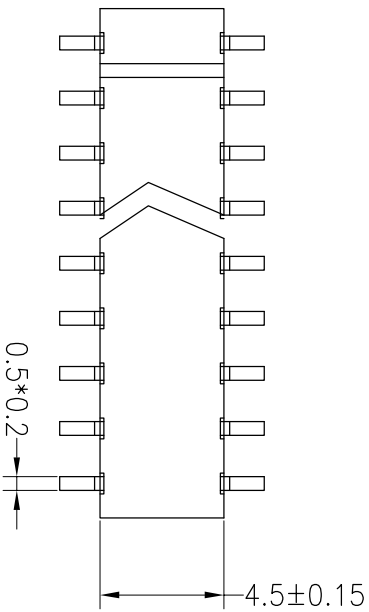

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION		DRAW	BEN	14.07.10	SCALE	FIT	PART NO.	TITLE:
				DIM	TOL				UNIT	mm		
A0	2014.07.10	NEW DRAWING		X.X	±0.30	CHECK					234501XXXXXXMUX01	
1				X.XX	±0.20							
				X.XXX	±0.10							
				Angle	±3°	APPROVE						

**JIN** 深圳市锦凌电子有限公司  
 SHENZHEN JINLING ELECTRONIC CO.,LTD  
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5892

2.00PF H4.5mm 1xNpin SMT Side Entry