


HSF RoHS

SPECIFICATIONS

Rated Current: 3.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze
 Contact Plating: Au or Sn Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: PBT
 Max. Processing Temp: 180°C for 30-60 seconds
 (200°C for 10 seconds)

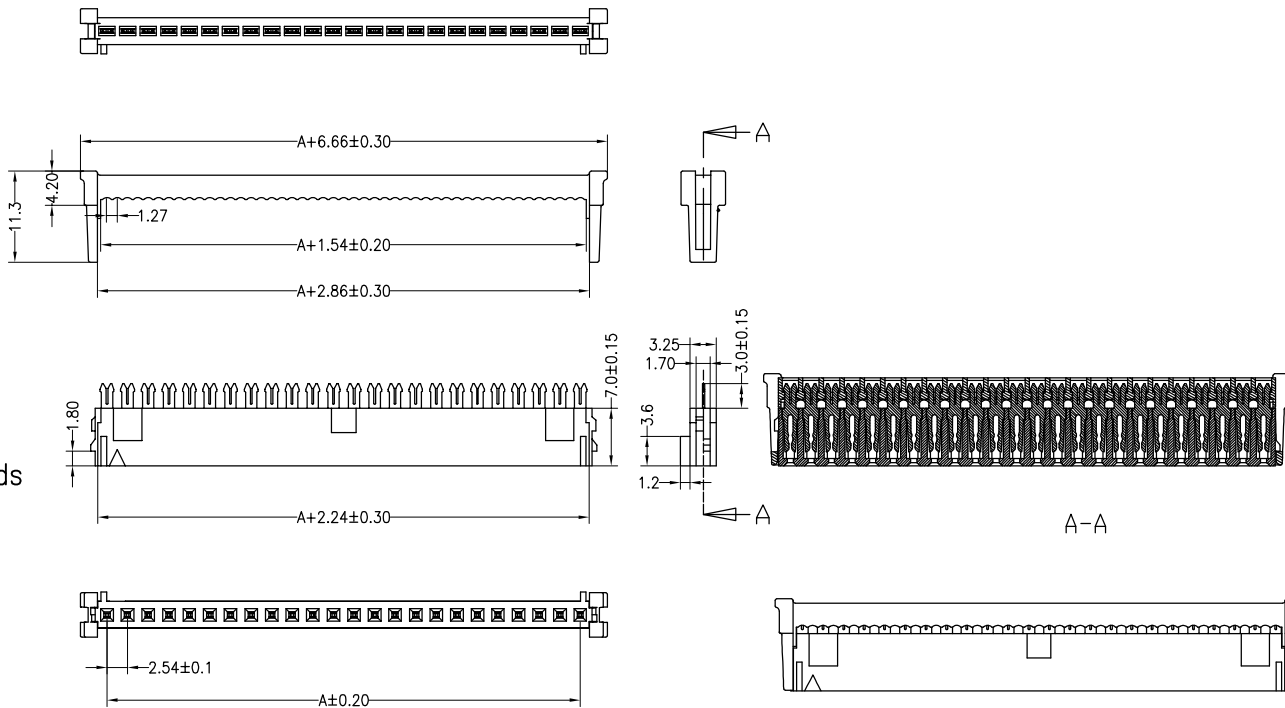

Ordering Information


5315 XX Y P XX B N 01

No. of Pins
08~24P

Contact Plating
S0: Gold Flash/Ni
NI: Ni

Insulation Color
B=Black

PART NO	Dim. A
8P	17.78
10P	22.86
14P	33.02
16P	38.10
20P	48.26
24P	58.42

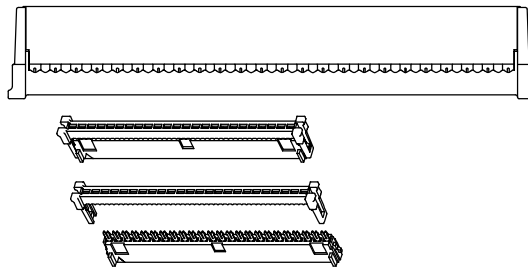

OPERATION		DRAW	Yiyusheng	17.07.05	SCALE	FIT
X.X	±0.30					
X.XX	±0.20	CHECK			UNIT	mm
X.XXX	±0.10		SIZE	A4		
Angle	±3°	APPROVE			SHEET	1/1
DIM	TOL		PROJ.	◆		

JiLN® 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2017.07.05	NEW DRAWING	

PART NO.	5315XXYPXXBN01
TITLE:	2.54FC Single Npin (单排双接触)