



HSE ROHS

SPECIFICATIONS

Rated Current: 3.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: PA66



注明: 带号码球的为重点尺寸

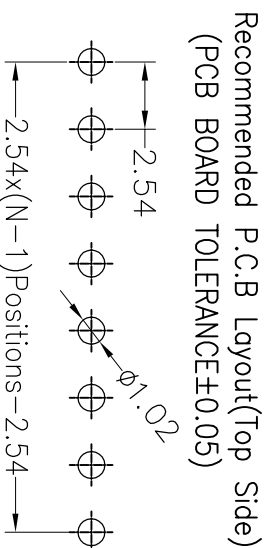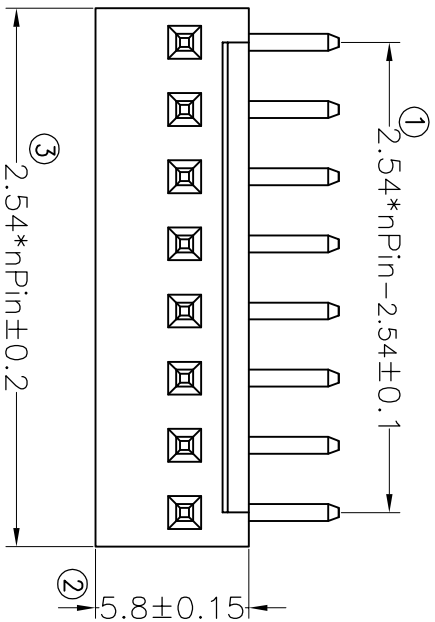

Ordering Information

JL2541R - XX B XX X X 02

R=90° No. of Pins Per Row 2-16P Insulator Material Option B=PA66 Contact Plating G0:Gold Flash G1:1U" Gold G2:1.5U" Gold G3:2U" Gold G4:3U" Gold G5:5U" Gold G6:10U" Gold S0:Gold Flash/Tin Insulator Color W=White E=Beige Packing 0=PE Bog A=Troy

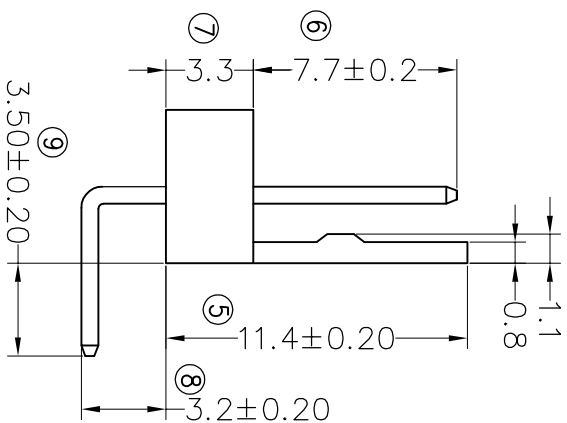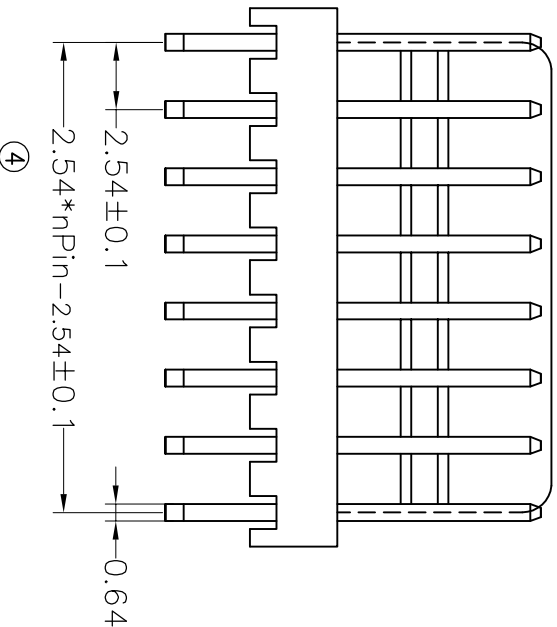

OPERATION		DRAW		SCALE		FIT		TITLE:	
OPERATION	UNIT	SCALE	UNIT	SCALE	UNIT	SCALE	UNIT	PART NO.	TITLE:
X.X	±0.30	Y YuSheng	mm	A4	1/1	JL2541R-XXBXXXX02			
X.XX	±0.20	CHECK							
X.XXX	±0.10								
Angle	±3°	APPROVE							
DIM	TOL								
CHANGE									
REV	DATE	MODIFICATION DESCRIPTION							
A0	2012.03.28	NEW DRAWING							
1									

JILIN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5892

2.54 Water M-Type Npin 90° 正等