


HSE ROHS

SPECIFICATIONS



Signal Rated Current: 3.0AMP
 Power Rated Current: 30AMP
 Contact Resistance: 30mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Power Contact Material: Phosphor bronze
 Signal Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 PEG Material: Phosphor bronze
 PEG Plating: Tin Over Ni

Insulator Material: Polyester (UL94V-0)
 Standard: PBT
 Max. Processing Temp: 180°C for 30-60 seconds
 (200°C for 10 seconds)



A-A SECTION

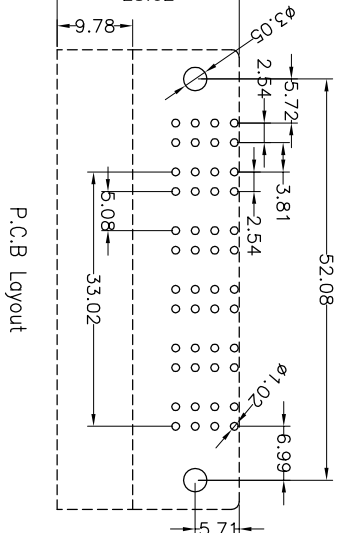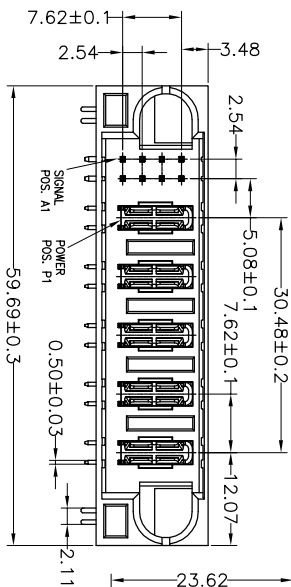




P.C.B Layout

Ordering Information

4500 - 13 M S1 X R X 01

No. of Pins: 8S+5P
 Contact Type: M/Male
 Contact Plating: S1:Gold/Matte-Tin
 Insulator Material: Option
 Packing: A: Tray, T: Tube
 Option: A=BK-PBT, C=BK-PA6T, D=BK-PA46, E=BK-PA9T, F=BK-LCP

2↗ 2.54X2.0P H 护套

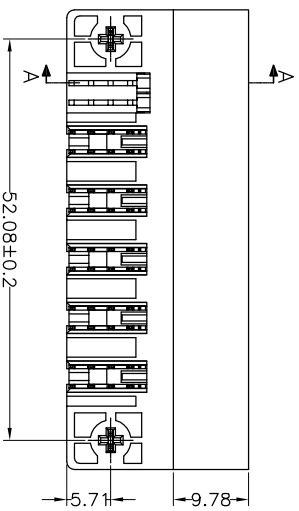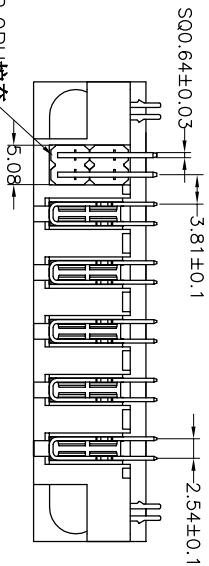

OPERATION		DRAW		SCALE		FIT		TITLE:	
XX	±0.30	YYuSheng	20.12.07	UNIT	mm	SIZE	A4	PART NO.	4500-13MS1XRX01
XX	±0.20	CHECK		SHEET	1/1	SHEET	1/1	PROJ.	
X:XXX	±0.10	APPROVE		ANGLE	±3°	TOL		CHANGE	
DATE	MODIFICATION DESCRIPTION	4	5	6	7	8	9	1	2
A0	2020.12.07	NEW DRAWING							
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL	APPROVE	PROJ.		
1									

JILIN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5892

7.62HCP 8S+5P 充电机电源座 考公